


MP-50-INT

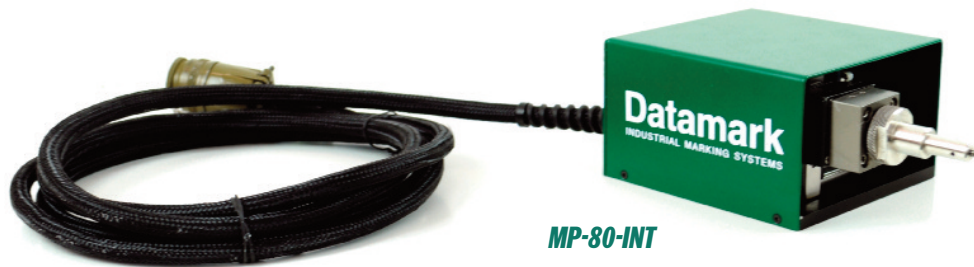

MP-80-INT

## MP Integrated Series

### Pneumatic dot peen markers for automation

REFERENCE MP-INT SERIES

MODEL:	MP-50-INT	MP-80-INT
Marking Window:	1.97" x 1.18" (50 x 30 mm)	3.15" x 1.18" (80 x 30 mm)
Marking Head Technology:	Pneumatic	
Operating Air Pressure:	60 to 85 psi	
Marking Stylus:	Standard LP-10 / HF-16 for ultra-high-speed	
Marking Control:	Plug & play 7" TFT SVGA touch-screen controller with 19.69 ft (6m) cable	
Interfaces:	USB, RS-232/RS-485, IN/OUT, start-stop	
Marking Data:	Alphanumeric text and keyboard symbols, serial numbers, automatic date & time, shift codes, data matrix codes, vector graphics and logos (.PLT)	
Automation:	Data entry via RS-232 Marking control through programmable commands	
Marking Fonts:	Dot matrix formed: 5x7, 7x9, 11x16 Continuous line: Fastflan and standard	
Dimensions (W x D x H):	Marking Head: 4.49" x 3.43" x 10.31"	Marking Head: 5.67" x 8.11" x 10.31"
	Controller: 11.3" x 3.54" x 7.28"	
Weight:	Marking Head: 3 lb 12 oz	Marking Head: 4 lb 3 oz
	Controller: 5 lb 15 oz	
Power Supply:	110/220V; 50/60Hz	
Certification:	CE	
Included Equipment:	<ul style="list-style-type: none"> <li>Start-stop button</li> <li>Air pressure regulator</li> </ul>	
Optional Equipment:	<ul style="list-style-type: none"> <li>Benchtop marking column and base</li> <li>Nameplate marking fixture</li> </ul>	